


A standard linear barcode is positioned vertically on the right side of the page. It consists of vertical black lines of varying widths on a white background. The barcode is oriented vertically, with the top line pointing upwards.

		Subclass
	Class	ISSUE CLASSIFICATION

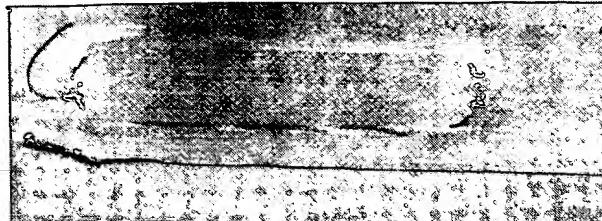

U.S. UTILITY PATENT APPLICATION

O.I.P.E.

PATENT DATE

SCANNED

ENNEDY, John J. 9.A. 10

SECTOR	CLASS	455 370	SUBCLASS	335	ART UNIT	2714	EXAMINER	Vanderpugge
--------	-------	---------	----------	-----	----------	------	----------	-------------

2664 FILED WITH: DISK (CRF) FICHE
(Attached in pocket on right inside flap)

Best Available Copy

PREPARED AND APPROVED FOR ISSUE

ISSUING CLASSIFICATION

TERMINAL DISCLAIMER	DRAWINGS			CLAIMS ALLOWED	
	Sheets Drwg.	Figs. Drwg.	Print Fig.	Total Claims	Print Claim for O.G.
<input type="checkbox"/> a) The term of this patent subsequent to _____ (date) has been disclaimed.				NOTICE OF ALLOWANCE MAILED	
	(Assistant Examiner) _____ (Date) _____				
<input type="checkbox"/> b) The term of this patent shall not extend beyond the expiration date, of U.S Patent. No. _____.				ISSUE FEE	
	(Primary Examiner) _____ (Date) _____			Amount Due	Date Paid
<input type="checkbox"/> c) The terminal _____ months of this patent have been disclaimed.				ISSUE BATCH NUMBER	
	(Legal Instruments Examiner) _____ (Date) _____				

WARNING:

The information disclosed herein may be restricted. Unauthorized disclosure may be prohibited by the United States Code Title 35, Sections 122, 181 and 368. Possession outside the U.S. Patent & Trademark Office is restricted to authorized employees and contractors only.

Form PTO-438A
(Rev. 6/98)

(LABEL AREA)

(FACE)